


USE OF GROUND PENETRATING RADAR FOR LANDMINE CLASSIFICATION BASED ON ARTIFICIAL NEURAL NETWORK



By

 P.S.L. Fernando
University of Moratuwa, Sri Lanka
Electronic Theses & Dissertations
www.lib.mrt.ac.lk

621.38 "04"

621.38(043)

This thesis is submitted to the Department of Electronic
and Telecommunication Engineering at the University of
Moratuwa in partial fulfilment of the requirements for
the Degree of Master of Engineering



University of Moratuwa



83814

October 2004

83814

Thesis
83814

USE OF GROUND PENETRATING RADAR FOR
LANDMINE CLASSIFICATION BASED ON ARTIFICIAL
NEURAL NETWORK

Submitted By

P.S.L. Fernando



University of Moratuwa, Sri Lanka
Electronic Theses & Dissertations
www.lib.mrt.ac.lk

Examining Committee

Dr. V.P.C Dassanayaka (Chairperson)

Dr. D.A.I. Munindradasa


Dr. K.G.P. Dharmawardena

This Research Project was carried out at the Department
of Electronic and Telecommunication Engineering of the
University of Moratuwa during the period from
February 2002 to October 2004

October 2004

DECLARATION

The work presented in this dissertation has not been submitted for fulfilment of any other degree.

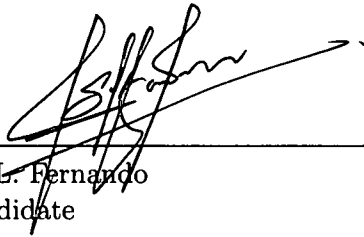

P.S.L. Fernando
Candidate

Dr. D.A.I. Munindradasa
Supervisor



Acknowledgements

The research presented in this thesis was carried out at the Department of Electronic and Telecommunication Engineering, University of Moratuwa during the period from February 2002 to October 2004.

First and foremost, I am indebted to Dr D. A. I. Munindradasa, my supervisor for his ever present guidance, encouragement, suggestions and constructive criticism while this research was being conducted. The author is most grateful to Dr V. P. C. Dhasanayaka for acting as the chairperson in the examining committee.

I also have to express my deepest thanks to Dr E. C. Kulasekere for his great assistance and continuous support throughout this research project. A very special thanks go to Dr R. Nilavalan, Communication Research Institute, University of Bristol, UK for providing valuable and current information on GPR.

I wish to express my thanks to Dr K. G. P. Dharmawardana for the coordination of this project. I am also pleased to acknowledge the contribution everyone has made in developing a specialist area of ground penetrating radar technology.

P.S.L. FERNANDO

University of Moratuwa

October 2004

NOMENCLATURE

μ_0	Absolute magnetic susceptibility of free space
ρ	Conductivity of the soil (S/m)
G_t	Gain of the transmitting antenna (dB)
G_r	Gain of the receiving antenna (dB)
η_0	Intrinsic impedance of the free space (Ω)
η_1	Intrinsic impedance of the soil (Ω)
η_2	Intrinsic impedance of the buried object (Ω)
$\tan \delta$	Loss tangent of the material
f	Operating frequency (Hz)
ϵ_0	Permittivity of the air (F/m)
μ_r	Relative permeability of the soil
ϵ_r	Relative permittivity of the soil
μ_r	Relative magnetic susceptibility of material
α	Signal attenuation constant of the soil (dB/m)



Abstract

This research is mainly aimed at developing a technique based on neural networks to classify metal and plastic objects buried within a range of soil conditions. In addition, the validity of this technique is also presented.

The explosives in land mines are generally cased in metal or plastic containers. Identification of buried metal and plastic objects using a neural network and a sensing technique based on an electromagnetic method are discussed in this thesis. Neural network simulation results for plastics and metal objects in the range of soil condition are also reported.

Finding the appropriate frequency window (FW) for the Ground Penetrating Radar (GPR) operation and the development of a theoretical mathematical model is also presented. Using this model, the appropriate FW for GPR operation is derived.

Furthermore the estimation of important system parameters of GPR, modulation and detection techniques, modelling of GPR, and clutter reduction techniques are also discussed in the context of this thesis.



Contents

Acknowledgements	iv
Abstract	vi
List of Figures	x
List of Tables	xii
CHAPTER 1 Introduction	1
1.1 Frequency Window	1
1.2 Motivation	2
1.3 Objective of the Research	2
1.4 Artificial Neural Network Approach	2
1.5 Practical limitations	3
1.6 Organization of Presentation	4
CHAPTER 2 Theoretical Frequency Window for GPR	5
2.1 Introduction	5
2.2 Surface Clutter	6
2.2.1 Minimizing Impedance Mismatch	6
2.2.2 Signal Attenuation	8
2.2.3 Resolution	10
CHAPTER 3 Estimation of System Parameters	12
3.1 Introduction	12
3.2 Evaluation of Losses	12
3.2.1 Path Loss	12
3.2.2 Antenna Loss L_e	13
3.2.3 Antenna Mismatch Loss L_m	13

3.2.4	Transmission Loss from Air to Soil L_{t1}	13
3.2.5	Retransmission Loss from Soil to Air L_{t2}	13
3.2.6	Spreading Loss L_s	13
3.2.7	Target-Scattering Loss L_{sc}	14
3.2.8	Material Attenuation Loss L_a	15
3.2.9	Processing Gain P_G	15
3.3	System Equation	15
3.4	Estimation of Buried Distance	16
3.4.1	Calculation of Relative Permittivity of the Soil	16
CHAPTER 4 Modulation Techniques		19
4.1	Introduction	19
4.2	Characteristics of Modulation Techniques	19
4.2.1	Frequency Modulated Continuous Wave	19
4.2.2	Synthetic Pulse Technique	20
4.2.3	Base Band Pulse BBP	20
4.3	Selecting the Appropriate Modulation Technique	21
CHAPTER 5 Post Reception Synthetic Focusing		22
5.1	Introduction	22
5.1.1	Spot Focusing	22
5.1.2	Processing Gain and Resolution	22
5.1.3	Post Reception Synthetic Focusing(PRSF)	23
5.1.4	Advantages of the PRSF Technique	24
CHAPTER 6 Modeling GPR		27
6.1	Introduction	27
6.2	Mathematical Analysis	28
6.2.1	Losses due to Dielectric Discontinuities L_{dd}	29
6.2.2	Antennae Spreading and Attenuation Loss L_s	30
6.2.3	Mathematical Model	30
6.2.4	Generating data	31
CHAPTER 7 Network Training and Simulation		33
7.1	Introduction	33
7.2	Data Structure for Training and Simulation	33



7.3	BPN Architecture	34
7.4	BPN Training	35
7.5	Network Simulation	37
7.6	Conclusion	37
CHAPTER 8 Conclusion and Future Work		42
8.1	Conclusion	42
8.2	Future Work	43
Bibliography		44
APPENDIX A Back Propagation Network		47
APPENDIX B Intrinsic Impedance and Skin Depth		48
B.1	Intrinsic Impedance η	48
B.2	Skin Depth D_s	48
APPENDIX C Mathematical Analysis of GPR		50



List of Figures

2.1	Variation of magnitude of impedance with frequency in wet soil	7
2.2	Variation of phase angle of impedance with frequency in wet soil	8
2.3	Variation of magnitude of impedance with frequency in dry soil	8
2.4	Variation of phase angle of impedance with frequency in dry soil	9
2.5	Variation of skin depth with frequency in wet soil	9
2.6	Variation of skin depth with frequency in dry soil	10
3.1	Transmitter output against target distance. This variation is exponential. GPR demands high power in soil having a higher attenuation constant. Peak to peak voltage required by GPR to detect a object at 50 cm, in a moderate soil is around 25 V	17
4.1	Commonly used base band pulses and their frequency spectrums	21
5.1	Near field spot focusing	23
5.2	Post-Reception Synthetic focusing GPR	25
5.3	Time domain coherent addition of target signals at the target location . . .	26
6.1	Schematic diagram for a typical GPR	28
7.1	Variation of Signal Level with Buried Distance. Scanning a buried object with closely spaced different frequencies, distinctive signal levels can obtained. These signal levels are a function of attenuation constant of the soil and relative permittivity of the object.	34
7.2	Variation profile of validation error of Metal and Plastic over the 32 number of training steps. The minimum error for metal and plastic occurs at 21 st , 25 rd , and 25 th training step	38
7.3	For Metal and Plastic in the soil condition ranging from 1 dB/m to 10 dB/m network gives two distinctive outputs below 33 cm mean depth	40

7.4	Variation of threshold levels with soil attenuation in step of 1 dB/m for the range of 3 dB/m to 10 dB/m. Object can be classified as Metal or Plastic when network output is greater than 0.44 and less than 0.41 respectively. .	41
A.1	Three layered BPN architecture	47
C.1	Propagation of signal in GPR at a presence of a buried object	50

List of Tables

2.1	Soil types and their electrical and dielectric properties	7
3.1	Target type and k value	14
3.2	Radar Cross-Sections	16
3.3	Material Loss at 100 MHz and 1 GHz	18
6.1	Attenuation and loss tangent measured at 1 GHz	31



University of Moratuwa, Sri Lanka.
Electronic Theses & Dissertations
www.lib.mrt.ac.lk