


LB/Don/57/06

DEE 05/05


SUBSTATION EARTHING DESIGN FOR A HIGH SOIL RESISTIVITY AREA

A dissertation submitted to the
Department of Electrical Engineering, University of Moratuwa
In partial fulfillment of the requirements for the
Degree of Master of Science



By

MADDUMA KANKANAMALAGE CHANDANI NILU
KUMARI AMARASIRI

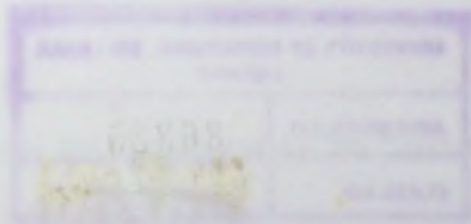

621.3"06"

621.3(043)

Supervised by : Prof. H.Y.R. Perera

Department of Electrical Engineering
University of Moratuwa, Sri Lanka

University of Moratuwa



86325

January 2006

86325



86325

DECLARATION

The work submitted in this dissertation is the result of my own investigation, except where otherwise stated.

It has not already been accepted for any degree, and is also not being concurrently submitted for any other degree.

UOM Verified Signature

MKCNK Amarasiri

30 / 01 / 2006

We / I endorse the declaration by the candidate.

UOM Verified Signature

Prof. H.Y.R.Perera

CONTENTS

Declaration	i
Abstract	iv
Acknowledgement	vi
List of figures	vii
List of tables	ix

Chapters

1. Introduction

1.1 Background	1
1.2 Safety in Grounding	2
1.3 Achievement	2

2. Methodology

2.1 Definition of key indices	3
2.2 Design Procedure	5
2.3 Measurement of Soil Resistivity	6
2.4 Analysis of soil resistivity measurements	9
2.4.1 Investigation of soil structure	9
2.4.2 Uniform soil assumption	10
2.4.3 The size of the ground conductor	11
2.4.3.1 Conductor material	11
2.4.3.2 Ground conductor size	11
2.5 Calculation of reduction factor	13
2.6 Tolerable limits of body current	14
2.6.1 The tolerable limits of body current	14
2.6.2 The tolerable step and touch potentials	16
2.7 Design of grid substation grounding system	17
2.7.1 Initial design	17
2.7.2 Calculation of grid Resistance	17
2.7.3 Determination of grid current	19
2.7.4 Determination of maximum grid current	19
2.7.5 Calculation of maximum mesh voltage	20
2.8 Field measurements of a constructed ground system	22
2.8.1 General	22
2.8.2 Field measurements	24

3. Satellite earthing system approach	
3.1 Analysis of different options	27
3.2 Option Implemented	28
4. Modifications to initial design	
4.1 Single line diagram	30
4.2 Calculation for the additional grid	31
4.3 Calculation of fault current distribution	33
4.4 Field measurements of soil resistivity of the remote earth	34
4.5 Calculation for the additional grid	
4.5.1 Reduction factor (C_s)	33
4.5.2 Calculation of grid resistance	34
4.5.3 Calculation of Touch and Step potentials	36
5. Validation	
5.1 Maximum Ground Potential Rise	40
5.2 Calculation of Mesh Voltage	41
5.3 Calculation of maximum Step Voltage	41
5.4 Field Measurements	42
6. Summary of Results	45
7. Conclusion	50
7. References	51
8. Appendix A	
Soil resistivity measurements of Main grid	52
9. Appendix B	
Field measurements of main Grid Resistance	53
10. Appendix C	
Soil resistivity measurements of Remote grid	55
11. Appendix D	
Field measurements of remote Grid Resistance	56
11. Appendix E	
Approximate split factor	57

Abstract

The earthing of electric installations plays an important part as regards the behaviour of the network and personal safety when there are disturbances.

Presently all earthing designs are performed by contractors and submitted to Ceylon Electricity Board for approval. But due to lack of information at the tender stage majority of the contractors are unable to bid the earthing design part accurately resulting deviations to the contract during the implementation stage. To minimize this problem Transmission Design Branch and the Transmission Maintenance Branch of the Ceylon Electricity Board jointly decided to do the Earthing Design and submitted with the tender for bidding.

After the initial soil resistivity measurements, it was found that the resistivity values were very high compared to other Grid Substation locations. Therefore it was decided to do an earthing design for Horana Grid Substation to identify the suitability of proposed land and identify the land to be developed to construct an additional earthing mat to transfer the earth fault current. Without a properly designed grounding system large potential differences can exist between different points within the substation itself. Under normal circumstances, the current flow through the grounding grid from line - to - ground faults that constitutes the main threat to personnel.

The earthing design for Horana Grid Substation has the following objectives.

1. Ensure such a degree of human safety that a person working or walking in the vicinity of grounded facilities, is not exposed to the danger of a critical electric shock. The touch and step voltages produced in a fault condition have to be at safe levels. A safe value is one that will not produce enough current within a body to cause ventricular fibrillation.
2. Provide means to carry and dissipate electric currents into earth under normal and faulty conditions without exceeding any operating and equipment limits or adversely affecting continuity of service.
3. Provide grounding for lightning impulses and the surges occurring from the switching of substation equipment, which reduces damage to equipment.
4. Provide a low resistance to protective relays to see and clear ground faults, which improves protective equipment performance, particularly at minimum faults.



Acknowledgement

I wish to express my appreciation and sincere thanks to the University of Moratuwa for providing me with the opportunity of following the Master's Degree Programme in Electrical Engineering and Professor H.Y.R.Perera of Department of Electrical Engineering who guided and assisted me as the Project Supervisor in selecting the topic and preparing the thesis report despite of his own work.

I would extend my sincere gratitude to the Ceylon Electricity Board, Mr. M.B.S. Samarasekara and Mr.B.Jayawardana who are attached to the Transmission Designs Branch who helped me in taking relevant measurements and providing the necessary references. And my special thanks to the staff of Lanka Transformers Limited who helped me providing necessary details.

At the same time I regret my inability to specially mention individuals, I am grateful to all my colleagues who helped me in numerous ways to make this exercise successful.

At last, I thank my family members for their support and understanding towards me in achieving this.

List of figures

Figure	Page
1.1 Basic Shock Situations	4
1.2 Design Procedure Block Diagram	5
2.3 Equally Spaced Four Point Method (Wenner Arrangement)	6
2.4 Graphical representation of soil resistivity of Main Grid – Data set 1	7
2.5 Graphical representation of soil resistivity of Main Grid – Data set 2	8
2.6 Graphical representation of soil resistivity of Main Grid – Data set 3	8
2.7 Graphical representation of soil resistivity of Main Grid – Data set 4	9
2.8 Fall of Potential Method	23
2.9 Apparent Resistance for various Spacing x	24
2.10 Graphical representation of Main Grid Resistance – Data set 1	25
2.11 Graphical representation of Main Grid Resistance – Data set 2	25
2.12 Graphical representation of Main Grid Resistance – Data set 3	26
2.13 Graphical representation of Main Grid Resistance – Data set 4	26
3.1 Resistance R_A of earth electrodes	29
4.1 Fault current distribution	30
4.2 Impedance distribution	33
4.3 Graphical representation of soil resistivity of Remote Grid – Data set 1	34
4.4 Graphical representation of soil resistivity of Remote Grid – Data set 2	35
4.5 Graphical representation of soil resistivity of Remote Grid soil resistivity – Data set 3	35
4.6 Graphical representation of soil resistivity of Remote Grid soil resistivity – Data set 4	36
4.7 Required Fault Current Distribution	39
5.1 Graphical representation of Main Grid Resistance – Data set 1	42

5.2 Graphical representation of Main Grid Resistance – Data set 2	43
5.3 Graphical representation of Main Grid Resistance – Data set 3	43
5.4 Graphical representation of Main Grid Resistance – Data set 4	44
5.5 Horana Grid Substation	46
5.6 Remote Grid	46
Annexure 1- Earthing System Layout	47
Annexure 2- Earthing Details	48
E.1 Approximate Split Factor S_f for two transmission lines	56



List of tables

Table	Page
2.1 Material Constants	12
2.2 Typical surface material resistivity	13
2.3 Typical values of D_f	20
4.1 Soil resistivity measurements at the soil for earth wires – Data set 1, Data set 2, Data set 3, Data set 4	37
6.1 Summary of results	45
A.1 Soil resistivity measurements of Main Grid Data set 1	51
A.2 Soil resistivity measurements of Main Grid Data set 2	51
A.3 Soil resistivity measurements of Main Grid Data set 3	51
A.4 Soil resistivity measurements of Main Grid Data set 4	51
B.1 Field measurements of Main Grid Resistance Data set 1	52
B.2 Field measurements of Main Grid Resistance Data set 2	52
B.3 Field measurements of Main Grid Resistance Data set 3	53
B.4 Field measurements of Main Grid Resistance data set 4	53
C.1 Soil resistivity measurements of Remote Grid Data set 1	54
C.2 Soil resistivity measurements of Remote Grid Data set 2	54
C.3 Soil resistivity measurements of Remote Grid Data set 3	54
C.4 Soil resistivity measurements of Remote Grid Data set 4	54
D.1 Field measurements of Remote Grid Resistance Data set 1	55
D.2 Field measurements of Remote Grid Resistance Data set 2	55
D.3 Field measurements of Remote Grid Resistance Data set 3	55
D.4 Field measurements of Remote Grid Resistance data set 4	55

